

AC loss calculation in coated conductor coils with a large number of turns

Enric Pardo

Institute of Electrical Engineering, Slovak Academy of Sciences,
Dubravská 9, 84104 Bratislava, Slovakia
enric.pardo@savba.sk

May 3, 2013

Abstract

For superconducting coils with many turns, it is widely believed that the magnetic field from magnetization currents is negligible compared to the one generated by the whole coil. This article shows that this is not true also for coils with a considerably large number of turns (up to thousands). We introduce a method to accurately calculate the AC loss in coils with virtually any number of turns that takes the magnetization currents into account. The current density and AC loss is analyzed for two windings made of coated conductor consisting of a stack of 32 pancake coils totaling 768 and 6400 turns, respectively.

1 Introduction

The AC loss in ReBCO^1 coated conductor coils has been a subject of intense study [1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12]. However most of the works are for single pancake coils or double pancakes, with the exception of [10, 11]. This is because of the complexity of the calculations. Real windings may contain thousands of turns, such as high-field magnets [13], SMES and transformers [14]. Therefore, it is needed to develop calculation methods for large number of turns without degrading the accuracy.

The present state of the art is to approximate that the effect of the whole coil in a certain turn is the same as an applied magnetic field. This applied field (“background magnetic field”) is computed by assuming that the current density is uniform in the rest of the turns (we name this approach as “uniform approximation”). Afterwards, the AC loss in the turn of study is estimated by either measurements in a single tape [15, 16] or by numerical calculations [17]. The problem of this approximation is that the neighboring turns shield the background magnetic field, in a similar way as in a stack of tapes [18, 19]. It is a question how important is this effect in coated-conductor windings consisting on stacks of pancake coils, where the shielding effect is expected to be high.

An important step forward for single pancake coils has been the continuous approximation [9]. This approximation substitutes the detailed coil cross-section

¹ $\text{ReBa}_2\text{Cu}_3\text{O}_{7-x}$ where Re is a rare earth, usually Y, Gd, Sm or a combination of those.

by a continuous one with a J_c corresponding to the cross-section average of the original coil. The current constrain is set by fixing the line integral in the axial direction to a certain value for every radial position. The continuous approximation is neither applicable to coils made of tapes or wires with non-negligible thickness of the superconducting core (such as Bi-2223 tapes or Bi-2212 or MgB_2 wires) nor for pancake coils with a large separation between turns.

In this article, we introduce a method to simplify the AC loss calculation without practically degrading the accuracy for general coils, including stacks of pancake coils with many pancakes, solenoids, and coils made of conductors with arbitrary thickness. In addition, we present the current density and the AC loss characteristics in two windings made of 32 pancake coils, with a total of 768 and 6400 turns, respectively.

The structure of the article is the following. First, we outline the general numerical method that takes into account the interaction of the magnetization currents between all the turns, which serves to monitor the accuracy of the considered approximations. Later, we introduce the simplified method. Subsequently, we discuss the calculated current distribution and AC loss for the two example coils made of coated conductor and evaluate the error committed by the considered approximations. Finally, we present our conclusions.

2 Calculation method

In this section, we first outline the general numerical method, which calculates the actual current distribution in all the turns of the coil, and afterwards we present a method to speed up the calculations for large number of turns.

2.1 General numerical method

In this work, the basic numerical method to calculate the current density and the AC loss in the superconductor is the Minimum Magnetic Energy Variation (MMEV) method, as described in [20, 5, 6]. The results of this method agree with experiments for coils [6, 10]. Additionally, MMEV has also been applied to model levitation [21, 22]. The MMEV method calculates the detailed current density, J , in the superconductor and assumes the critical-state model in its general form. That is, $|J| < J_c$ for $E = 0$ and $|J| = J_c$ for $|E| > 0$, where J_c is the critical current density and E is the electric field. In this work, we take the cylindrical symmetry of the coils. Although this method is much faster than commercial Finite Element Methods (FEM) [23], calculations for coils with a large number of turns are still lengthy.

2.2 Approximations for large number of turns

Next, we present a model to speed up the calculations practically without degrading the accuracy that is applicable to any numerical method, not only for MMEV but also for models based on FEM.

In order to calculate the current distribution in a certain turn of the coil, the most straightforward approximation is to assume that the current density in all the other turns is uniform (“uniform” approximation). This approach neglects

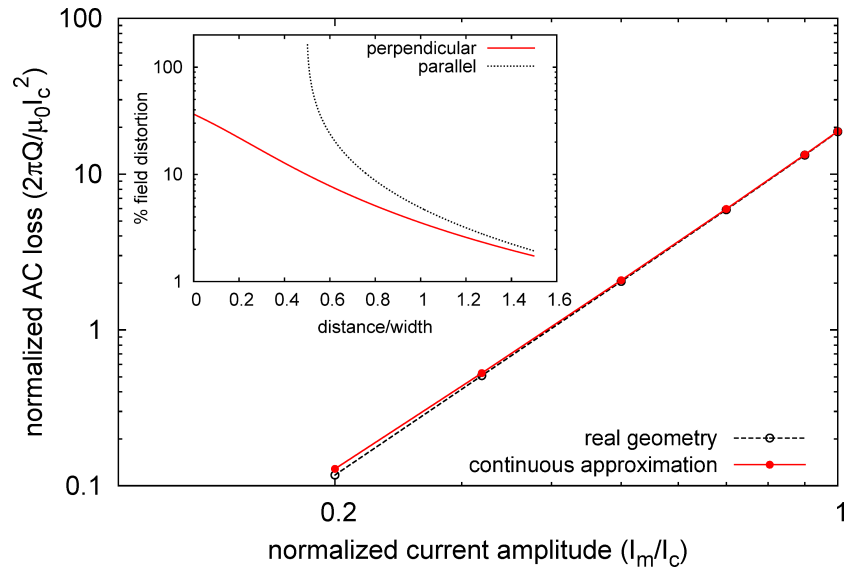


Figure 1: Normalized AC loss ($2\pi Q/\mu_0 I_c^2$, where Q is the AC loss per cycle and tape length and I_c is the critical current) for one of the 200-turn pancake coils composing the “continuous” coil (table 1). The inset shows the distortion of the magnetic field generated by a single tape with constant J_c transporting 20 % of the critical current relative to the magnetic field assuming uniform current density. The two curves are for lines parallel and perpendicular to the tape surface, respectively, with origin at the center of the tape (only the region outside the superconductor is shown).

the magnetic shielding effect originated by the magnetization currents in the neighbouring turns, which often introduces significant errors. However, this is the approximation that is most commonly used in practice.

A more accurate approach is to assume uniform current distribution only for the turns farther than the turn of study by a certain distance. We name this approach “neighbor approximation”. This approximation is based on the fact that the distance from the tape where the magnetic field is influenced by the non-uniformity of J is of the order of the width of the tape (insert of figure 1). For stacks of pancake coils², it may be convenient to take each pancake coil as an indivisible unity. That is, J is either assumed uniform in all the turns of the pancake coil or the numerical routine calculates the detailed J in the whole pancake. The convenience of this approach is clear for coils that their radial thickness is smaller than the tape width. For closely packed pancake coils with a thickness larger than the tape width, it is useful to keep the pancake coils as an indivisible unity and assume the continuous approximation [9] for each pancake coil. Summarizing, for stacks of pancake coils, the neighbor approximation consists on assuming uniform J in all the turns except in the pancake where J is calculated and its neighbor pancakes up to a certain order (for instance 1st or 2nd neighbors).

3 Studied coils

In this article, we analyze two examples: one taking the real geometry of the pancake coils (real thickness of the superconducting layer and spacing between turns) and the other one taking the continuous approximation for each pancake coil. We name these coils “detailed” and “continuous”, respectively. Their number of turns and assumptions for J_c are outlined in table 1. For both coils, the width and thickness of the tape are 3.96 mm and 1.4 μm , respectively³, the separation between turns is 188 and 465 μm in the radial and vertical directions, respectively, and the inner radius is 29.5 mm. For the “detailed” coil we take the anisotropy and magnetic field dependence of J_c from [10], related to a particular SuperPower tape [24] at 77 K. For simplicity, we assume a constant J_c for the “continuous” coil corresponding to 100 A of critical current (for the ‘continuous’ coil, $I_c = 100$ A requires temperatures below 77 K). With this parameters, the maximum magnetic field at the center of the coils is 0.3 and 4.7 T, respectively. The computations use 1 current element in the tape thickness for the “detailed” geometry and 20 elements in the radial direction of the pancakes for the “continuous” case, between 76 and 154 elements across the tape width (the highest value is for the lowest current amplitudes, I_m), and a tolerance of J_c between 0.20 and 0.035 % of $J_c(B = 0)$ (the lowest values are for the lowest I_m).

4 Results and Discussion

This section presents the results of the current density and AC loss for the two studied coils: the “detailed” and “continuous” coils (see table 1 and sec-

²Solenoids can be approximated as a stack of pancake coils.

³With the term ‘tape’ we mean the superconducting layer of the coated conductor, not the whole coated conductor.

Table 1: The studied coils. The continuous approximation [9] is taken for the “continuous” coil. More data in the text.

Coil name	Turns per pancake	Pancakes	Assumption for J_c
“detailed”	24	32	Dependent on B and its orientation.
“continuous”	200	32	Constant

tion 3 for more details). The applicability of the “uniform” and “neighbour” approximations are also discussed.

4.1 “Detailed” coil

The current density in the “detailed” coil presents the following features (figure 2 shows the average current density across the superconductor thickness for the central turn of each pancake: 12^{th} turn from the inner radius). The uniform approximation fails to predict the current distribution (figure 2a). The reason is that in the real case, the neighboring turns in the radial direction shield the magnetic field created by the rest of the turns, while the uniform approximation neglects this effect. As a result, for the uniform approximation the magnetization currents are larger and the plateau at the turn center disappears. In addition, the actual current distribution in the neighboring pancakes influences the magnetic field. In the real case, the neighboring pancakes partially expel the magnetic field, which concentrates between the pancakes. This increases the magnetic field close to the tape edges, locally reducing J_c . As a consequence, J_c decreases compared to J_c for the uniform approximation (see figure 2a). On the contrary, taking into account the neighbor approximation of 1st order already produces a satisfactory result (figure 2b). The approximation improves with approaching to the coil ends. The cause is that the average distance from the rest of the superconducting turns is the largest, and thence the magnetic field distortion from the J non-uniformity is the lowest.

The validity of the uniform and neighbor approximations can be quantified by the error in the total AC loss (figure 3). The uniform approximation largely over-estimates the AC loss because it over-considers the magnetization currents. The difference increases with decreasing the current amplitude. The coil rated current (critical current of the weakest turn) is computed to be 51 A, compared to 128 A for an isolated tape. Again, the neighbor approximation provides a satisfactory result. The obtained values are better than for the uniform approximation, also for the neighbor approximation of 0th order. That is, J is assumed uniform in the tapes in all pancakes, except the one where J is calculated. The neighbor approximation slightly under-estimates the AC loss. The error increases with decreasing the current amplitude because at low amplitudes the current concentrates close to the tape edges, and thence it is less uniform.

4.2 “Continuous” coil

The results for the “continuous” coil qualitatively describe real-size magnets. These results are the following.

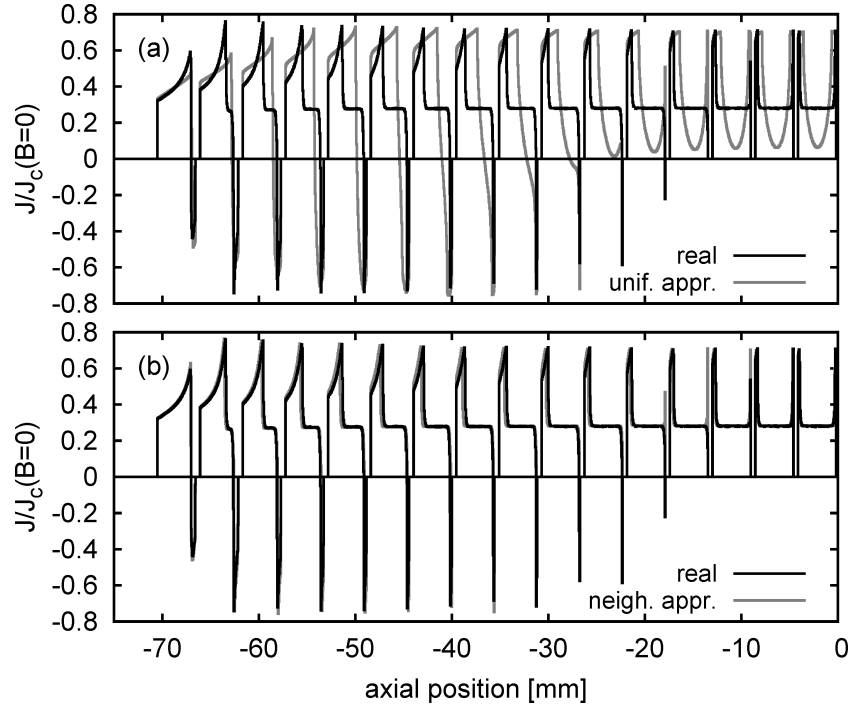


Figure 2: Average current density across the tape thickness for the 12th turn starting from the inner radius for the “detailed” coil (table 1). The uniform approximation (unif. appr.) fails to predict the current density (a), while the neighbor approximation (neigh. appr.) is satisfactory (b). The calculated case is for the peak of the AC current with 46 A amplitude. Only the lower half of the coil is shown, although the whole coil is calculated.

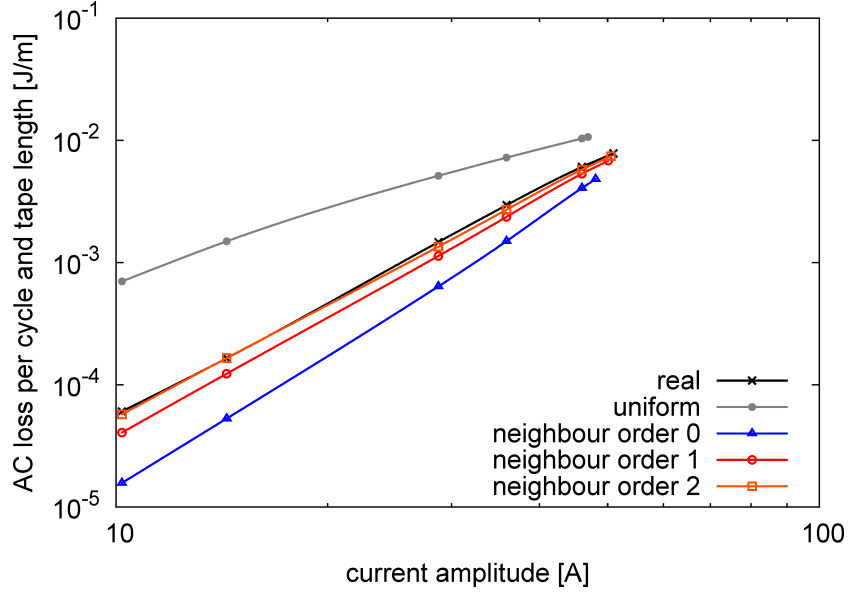


Figure 3: The AC loss for the “detailed” coil shows that the results for the “neighbor” approximation converge to those for the “real” geometry with increasing the order of the neighbors involved, while the “uniform” approximation introduces a large error.

The current density by assuming only the continuous approximation is in figure 4. Note that the continuous approximation practically does not introduce any error (see the AC loss for one isolated pancake in figure 1). Back to figure 4, the four top pancakes are saturated with magnetization currents, while in the other pancakes there appears a sub-critical region with roughly uniform current density. For the unsaturated pancakes, the critical region is wider at the mid radius, its width decreases with approaching to the inner and outer radius and sharply increases at those radius. The causes are that, first, the radial magnetic field presents a maximum close to the mid radius and, second, the magnetic shielding effect from the magnetization currents drops at both edge radius (see figure 4 in [18]).

The AC loss in the “continuous” coil without making further approximations presents a change in slope, from around 2.6 at low current amplitudes to around 1.7 at high amplitudes (see figure 5). The current amplitude where this change of slope appears corresponds to the saturation by magnetization currents in the end pancakes, which contribute the most to the AC loss. Therefore, this change of slope evidences that the magnetization loss is dominant.

One may expect that the uniform approximation is accurate for magnets with many turns because in the turns that contribute the most to the AC loss (top and bottom pancakes [10]), the local magnetic field is much larger than the self-field of one turn (for the situation in figure 4, in the central turn of the top pancake the section average self-field is around 10 mT, while the radial component of the background magnetic field is around 530 mT). However, the uniform approximation largely over-estimates the AC loss except close to the

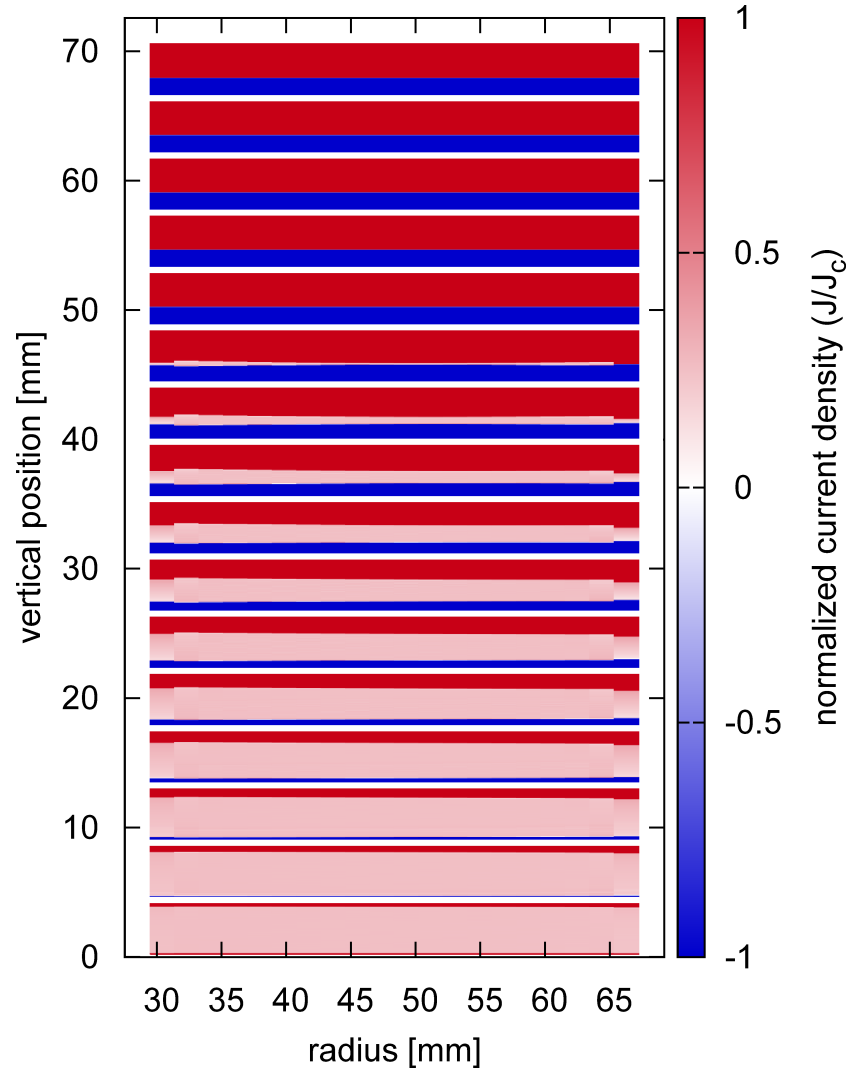


Figure 4: Upper half of the cross-section of the “continuous” coil (the model calculates the whole coil). The current density is for the peak of the AC cycle with amplitude $0.32I_c$.

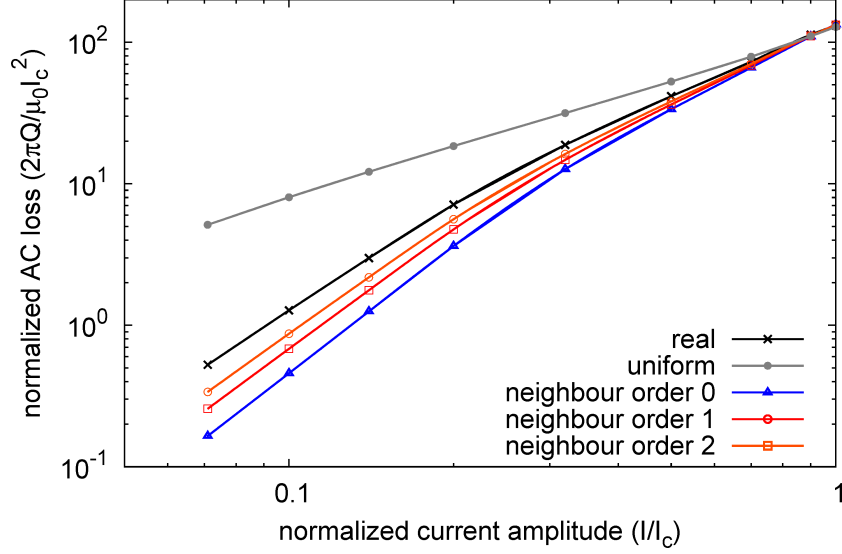


Figure 5: The same as figure 3 but for the “continuous” coil (the “real” case takes only the continuous approximation[9]). The AC loss normalization is the same as in figure 1.

critical current (see figure 5). The reason is that the uniform approximation neglects the shielding currents from the whole pancake, which are much larger than for one single tape. These shielding currents decrease the local radial magnetic field in the top pancake from around 530 mT for uniform currents to 280 mT in the real case (at the boundary between $J = +J_c$ and $J = -J_c$, figure 4). The effect of the shielding currents decreases with increasing the transport current amplitude. The cause is that with increasing the net current both the magnetic field created by the other pancakes increases and the shielding currents decrease.

The error caused by taking the neighbor approximation is low, decreasing with increasing the order of the neighbors (figure 5). However, this approximation is less effective for the “continuous” coil as for the “detailed” one (compare figures 3 and 5) because the pancakes for the former are one order of magnitude wider than for the latter, and thence the magnetic field due to the non-uniform current density expands to larger distances.

5 Summary and conclusions

Summarizing, in this article we have discussed the current density and AC loss in coils with a high number of turns, in particular two coils with 768 and 6400 turns, respectively. We have also presented the neighbor approximation and we have found that the error that this approximation introduces is small. However, the usual uniform approximation (J assumed uniform except in the turn of study) fails to predict the current density and the AC loss. The reason is that the magnetic field generated by the magnetization currents is comparable to the background magnetic field, also for coils with thousands of turns.

In conclusion, we have found that for coils made of stacks of pancakes with closely packed thin conductors, it is necessary to use relatively detailed calculations in order to achieve a satisfactory AC loss estimate. Combining the neighbor approximation with the continuous approximation, it is feasible to accurately calculate the AC loss in coils with virtually any number of turns.

Acknowledgements

The author acknowledges M. Staines for discussions. The research leading to these results has received funding from the European Union Seventh Framework Programme [FP7/2007-2013] under grant agreement no. NMP-LA-2012-280432 and Euratom FU-CT-2007-00051.

References

- [1] J. H. Claassen. An approximate method to estimate ac loss in tape-wound superconducting coils. *Applied Physics Letters*, 88:122512, 2006.
- [2] J.R. Clem, J.H. Claassen, and Y. Mawatari. AC losses in a finite Z stack using an anisotropic homogeneous-medium approximation. *Superconductor Science and Technology*, 20:1130, 2007.
- [3] M. Polak, E. Demencik, L. Jansak, P. Mozola, D. Aized, C. L. H. Thieme, G. A. Levin, and P. N. Barnes. ac losses in a $\text{YBa}_2\text{Cu}_3\text{O}_{7-x}$ coil. *Applied physics letters*, 88(23):232501–232501, 2006.
- [4] F. Grilli and S. P. Ashworth. Measuring transport ac losses in YBCO-coated conductor coils. *Superconductor Science and Technology*, 20:794, 2007.
- [5] E. Pardo. Modeling of coated conductor pancake coils with a large number of turns. *Superconductor Science and Technology*, 21:065014, 2008.
- [6] J. Šouc, E. Pardo, M. Vojenčiak, and F. Gömöry. Theoretical and experimental study of ac loss in high temperature superconductor single pancake coils. *Superconductor Science and Technology*, 22:015006, 2009.
- [7] W. Yuan, A. M. Campbell, and T. A. Coombs. ac losses and field and current density distribution during a full cycle of a stack of superconducting tapes. *Journal of Applied Physics*, 107:093909, 2010.
- [8] M.D. Ainslie, V.M. Rodriguez-Zermeno, Z. Hong, W. Yuan, T.J. Flack, and T.A. Coombs. An improved FEM model for computing transport AC loss in coils made of RABiTS YBCO coated conductors for electric machines. *Superconductor Science and Technology*, 24:045005, 2011.
- [9] L. Prigozhin and V. Sokolovsky. Computing ac losses in stacks of high-temperature superconducting tapes. *Superconductor Science and Technology*, 24:075012, 2011.

- [10] E. Pardo, J. Šouc, and J. Kováč. AC loss in ReBCO pancake coils and stacks of them: modelling and measurement. *Superconductor Science and Technology*, 25:035003, 2012.
- [11] Victor MR Zermeno, Asger B Abrahamsen, Nenad Mijatovic, Mads Peter Sorensen, Bogi B Jensen, and Niels F Pedersen. Simulation of an hts synchronous superconducting generator. *Physics Procedia*, 36:786–790, 2012.
- [12] M. Zhang, J. Kvitkovic, J.-H. Kim, C. H. Kim, S. V. Pamidi, and T. A. Coombs. Alternating current loss of second-generation high-temperature superconducting coils with magnetic and non-magnetic substrate. *Applied Physics Letters*, 101(10):102602–102602, 2012.
- [13] Ulf P Trociewitz, Matthieu Dalban-Canassy, Muriel Hannion, David K Hilton, Jan Jaroszynski, Patrick Noyes, Youri Viouchkov, Hubertus W Weijers, and David C Larbalestier. 35.4 t field generated using a layer-wound superconducting coil made of (re) ba 2 cu 3 o 7-x (re= rare earth) coated conductor. *Applied Physics Letters*, 99(20):202506–202506, 2011.
- [14] Michael Staines, Neil Glasson, Mohinder Pannu, Kailash P Thakur, Rod Badcock, Nathan Allpress, Premal DSouza, and Evgueni Talantsev. The development of a roebel cable based 1 mva hts transformer. *Superconductor Science and Technology*, 25(1):014002, 2012.
- [15] M. P. Oomen, R. Nanke, and M. Leghissa. Modelling and measurement of ac loss in BSCCO/Ag-tape windings. *Superconductor Science and Technology*, 16:339, 2003.
- [16] A. Kawagoe, F. Sumiyoshi, T. Mito, H. Chikaraishi, T. Baba, K. Okumura, M. Iwakuma, T. Hemmi, K. Hayashi, R. Abe, et al. Winding techniques for conduction cooled lts pulse coils for 100 kj class ups-smes as a protection from momentary voltage drops. *IEEE Transactions on Applied Superconductivity*, 14(2):727–730, 2004.
- [17] H. Tonsho, M. Toyoda, S. Fukui, M. Yamaguchi, T. Sato, M. Furuse, H. Tanaka, K. Arai, and M. Umeda. Numerical evaluation of ac loss in high temperature superconducting coil. *IEEE Transactions on Applied Superconductivity*, 14(2):674–677, 2004.
- [18] E. Pardo, A. Sanchez, and C. Navau. Magnetic properties of arrays of superconducting strips in a perpendicular field. *Physical Review B*, 67(10):104517, 2003.
- [19] F. Grilli, S. P. Ashworth, and S. Stavrev. Magnetization ac losses of stacks of YBCO coated conductors. *Physica C*, 434:185–190, 2006.
- [20] E. Pardo, F. Gömöry, J. Šouc, and J. M. Ceballos. Current distribution and ac loss for a superconducting rectangular strip with in-phase alternating current and applied field. *Superconductor Science and Technology*, 20(4):351–364, 2007.
- [21] N. Del Valle, A. Sanchez, E. Pardo, D.-X. Chen, and C. Navau. Optimizing levitation force and stability in superconducting levitation with translational symmetry. *Appl. Phys. Lett.*, 90(042503), 2007.

- [22] Nuria Del-Valle, Carles Navau, Alvaro Sanchez, and Du-Xing Chen. Tunability of the critical-current density in superconductor-ferromagnet hybrids. *Applied Physics Letters*, 98(20):202506–202506, 2011.
- [23] F. Grilli and E. Pardo. Simulation of ac loss in roebel coated conductor cables. *Superconductor Science and Technology*, 23:115018, 2010.
- [24] SuperPower, Inc. <http://www.superpower-inc.com/>.